


DBS-3x5 3x5 Diffractive Beam Splitter

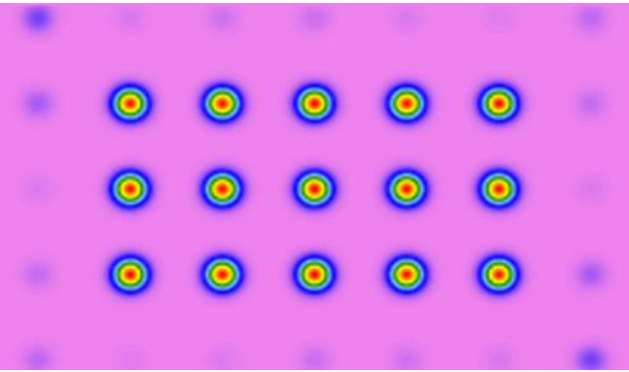

PRODUCT FEATURES

- ▲ Separation of the input beam into fifteen beams
- ▲ Thin single optical element

APPLICATIONS

- ▲ Parallel laser material processing
- ▲ Parallel laser scanning
- ▲ Laser perforation
- ▲ Optical measurement

RELATED PRODUCT

- ▲ Rotation mount HSF03 for rotation /alignment of the spot array



3x5 beam splitters diffract the input beam into 15 beams. Each beam has > 5 % of total input power. The uniformity error $(I_{max} - I_{min}) / (I_{max} + I_{min})$ is < 5 %. Besides, the power in the highest unwanted diffraction order is < 0.55 % (of input power).

SPECIFICATIONS

Efficiency	> 75 %
Uniformity error	< 5 %
Strongest unwanted beam	< 0.55 %
Dimensions ¹⁾	dia. 25.4 mm / thickness 3 mm
Active area ¹⁾	dia. 23 mm
Material ¹⁾	fused silica
Damage threshold	10 J/cm ² @ 1064 nm, 10 ns 5 J/cm ² @ 532 nm, 10 ns 3 J/cm ² @ 355 nm, 10 ns

Incl. AR/AR coating

¹⁾ Others on request

AVAILABLE SEPARATION ANGLE α

1064 nm	1030 nm	532 nm	515 nm	355 nm	343 nm
0.100 °	0.097 °	0.050 °	0.049 °	0.034 °	0.032 °

Model No.: DBS-3x5-wavelength-separation angle

Other angles or wavelengths on request.